



# KOMATSU TAILLIGHT

## Application

The Komatsu taillight kit mounts easily to the factory location and features three identifiable light signals: (red) brakelights, taillights, (amber) dynamic brake indicator, and (white) reverse.

## SPECIFICATIONS

### Mechanical Information:

Fixture Weight:	11.6lbs (5.26kg)
Shipping Weight:	25.2lbs (11.2kg)
Mounting:	Direct Replacement Mounts to Factory Location

### Electric Specifications:

Operating Voltage:	9-32V DC
Operating Temp:	-40°C ~ 85°C
Amp Draw:	3A @ 24V DC
Lifespan:	50,000 hrs
Vibration:	8.7 Grms

### KOM-TLAMBER:

Wattage :	7W
LED:	P4 (Amber) X 4EA
Finish:	Marine Grade Amber Coating
Indication:	Dynamic Brake Indicator
Connector:	2 Pin Deutsch

### KOM-TLRED:

Wattage :	High: 7W   Low: 2.5W
LED:	P4(Red) X 4EA
Finish:	Marine Grade Red Coating
Indication:	Brakelight, Taillights
Connector:	3 Pin Deutsch


### KOM-TLWHITE:

Wattage :	10W
LED:	P4(White) X 4EA
Finish:	Marine Grade White Coating
Indication:	Reverse
Connector:	2 Pin Deutsch



PART #:	BEAM PATTERN
KOM-TLA (Kit)	40°
KOM-TLAMBER (Amber)	40°
KOM-TLRED (Red)	40°
KOM-TLWHITE (White)	40°

## 2D DRAWING:

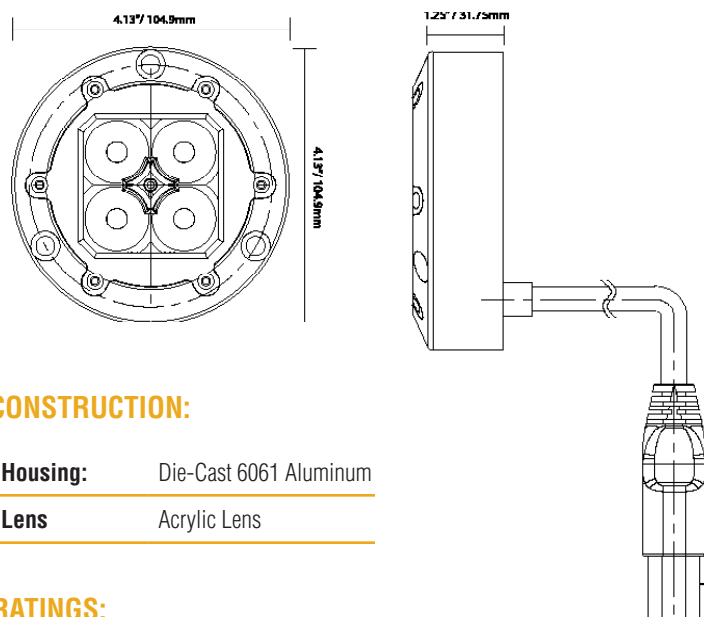

## CONSTRUCTION:

Housing:	Die-Cast 6061 Aluminum
Lens	Acrylic Lens

## RATINGS:

Ingress Protection:	IP-68, IP69k
---------------------	--------------