



# Installation Instructions & User's Manual





### **VISION X**



# About The Xmitter Prime Extreme:



#### **FEATURES**

- 1. High performance 5 watt LED.
- 2. Xtreme output in compact housing.
- 3. PMW (Pulse With Modulation) integrated dimming circuitry.

#### **XMITTER PRIME XTREME SPECIFICATIONS**

1. Warranty : Extended

2. Amp Draw : 2.5A - 37.5A @ 12V DC

3. Input Voltage : 9-32V DC 4. Beam Patterns : 10°, 40°, Mixed

5. LED Lifespan : 50,000 Hours

### **PREPARATION**

- 1. We recommend completely reading instructions before installing.
- 2. Consult your local state regulatory agency regarding the use of LED lighting.
- 3. The placement of LED lighting should not restrict airflow to the radiator, or block head lamps, turn signals, or parking lights.

#### **MAINTENANCE**

 All Vision X models have been designed for maintenance free use. In the case an LED lamp or other part replacement is needed please contact your authorized service center.

## XMITTER PRIME XTREME











Table 1: MOUNTING FEET BY NUMBER OF LEDS

| LED          | 6LED | 12LED | 18LED | 30LED | 36LED | 54LED | 72LED | 90LED |
|--------------|------|-------|-------|-------|-------|-------|-------|-------|
| # of<br>Feet | 1    | 2     | 2     | 3     | 4     | 5     | 6     | 6     |

### **WARNINGS**

As with many other high-tech products, this VISION X LED requires a bit of attention before you can use it. Please read the accompanying information carefully first.

- 1. Don't stare directly into the light or shine directly into the eyes of another person as this may cause temporary loss of vision.
- 2. Never disassemble the products, as all parts must be factory serviced to insure proper operation.
- 3. Don't interchange the parts inside this light with other products.
- 4. The LED light is to be mounted on the vehicle only in a vertical, bottom mounting, or in a suspended position.
- 5. After turning on the light, the body might be hot enough to warrant a burn risk. Be careful when you touch the body after turning on the light for a long period of time.
- 6. Use the supplied wire harness for electrical installation.
- 7. The LED light must not adversely affect the performance of low beam, high beam, engine cooling or the driver's view.

### **VISION X**





#### WIRING INSTALLATION INSTRUCTION

- 1. Find a suitable place to mount Relay Part (R1) leaving enough room for Power & Ground wires Part (W1 & W2) to reach the battery & the Deutsch connector Part (C1) to reach the Light. Mount Relay.
- 2. Run Power wire (W1) & Ground wire (W2) to the battery. Connect the Power wire (W1) to the Positive (+) battery terminal and connect the Ground wire (W2) to the Negative (-) battery terminal.
- 3. Run the Deutsch connector wire (C1) to the light and plug in.
- 4. Disconnect the Switch Part (S1) at the white Plug Part (P1) and run the wire through the vehicles fire wall to desired mounting location inside the Cab [using a factory rubber or plastic grommet is suggested].
- 5. Drill the hole to the required size for the Switch (S1) and mount to desired position.
- 6. Reconnect the Switch (S1) to the Harness.
- 7. Test Light.

#### **DIMMING FUNCTION**

Your light is capable of dimming through the Prime Drive wire on the light's plug. To achieve this requires our authorized accessories, the XIL-PDIMMER, or XIL-PDIMMERBUTTON.

**Do Not** connect the Prime Drive wire without authorized accessories as this will damage the electronics.


#### **MANUFACTURER RECOMMENDATION**

For those unfamiliar with electrical wiring on vehicles, Vision X recommends that all LED Lighting products are professionally installed.

# XMITTER PRIME XTREME



#### **WIRING DIAGRAM:**

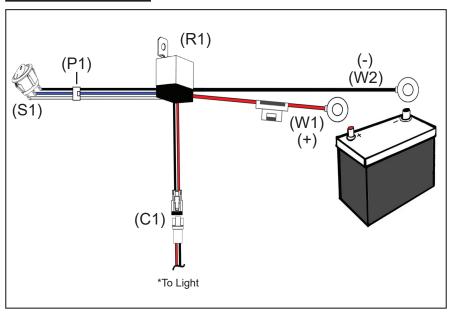

#### **COMPONENTS KEY**

Part (R1) Relay

Part (W1) Power Wire for Relay Coil

a. 9-32V DC Positive (+) Input Wire

Part (W2) Ground Wire for Relay Coil

a. 9-32V DC Negative (-) Input Wire

Parts (C1) Deutsch Connectors for Lights

a. Attached to 9-32V DC Positive (+) Power Wires

Part (S1) Switch

Part (P1) Switch Plug

### **DIMMER WIRE:**

Do Not connect without authorized accessories.

**TIP:** For complete application guide see website

### **VISION X**



WARNING: Bolts, Nuts, and Washers are Stainless Steel. <u>DO NOT USE</u> Pneumatic or Electric Tools to Tighten and Loosen. The <u>Hardware Will Permanently Lock Together</u>.

#### MOUNTING INSTALLATION INSTRUCTION FOR FEET

- Start by setting the light bar in the location that you plan to mount it in. Mark each end of the light bar and measure the length.
- 2. Depending on the length of your light bar, you will have a certain number of mounting feet Part (F1) included in the packaging. These feet fit into grooves on the back of the light bar. [See Figure 1]
- 3. Place each mounting foot (F1) bolt head first into light bar rail grooves on the back of the light. [See Figure 1]
- 4. Mark the location of each mounting feet on your vehicle. Drill holes for each. The feet can slide right to left inside the grooves, letting you fine tune the location.
- 5. Remove the nut from the feet bolt, and place the light bar onto your vehicle, line up the bolts with the previously drilled holes. (See Figure 2)
- 6. Securely tighten the nut to the mounting feet bolt.



Disassembled Foot Mount, included with every Vision X LED Light Bar. Comes assembled.


### LIGHT ANGLE ADJUSTMENT

- 1. Use the provided 6mm Allen wrench Part (A1) to loosen both Allen bolts on each side the light bar. Once desired angle is achieved, tighten the bolts.[See Figure 3]
- 2. A good reference point is at 20 ft; the top of the beam should be 3" down from center of light (with the light bar at dead center). Tighten light and enjoy.

# XMITTER PRIME XTREME



#### **INSTALLATION IMAGES**

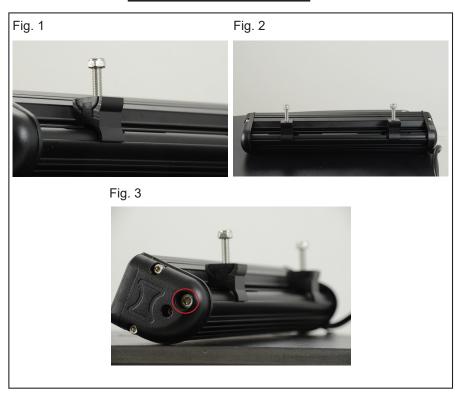

**TIP:** Vision X recommends the use of liquid thread-locker, or Loctite, to ensure that every bolt and nut are safely secured.



**TIP:** For complete application guide see website



# You May Also Be Interested In:



Part # - 9890975 Item # - XIL-OEH0713JK Jeep JK Vehicle Specific Hood Mount Bracket (visit www.visionxusa.com for a full list of vehicle specific products)



**CLAMP TUBE MOUNT** (0.75"-3.0" Diameter Available)



Part # - 4009257 Item # - XIL-PDIMMER Dial Knob Dimmer to Adjust the Push Button Dimmer Switch Light Output



Part # - 4009264 Item # - XIL-PDIMMERBUTTON Between 50% & 100% Brightness Bolt Set



Part # - 9888811 Item # - XIL-LPECM Xmitter Lo Pro Prime Xtreme Series Light Bar End Cap Mount



Part # - 4000308 Item # - XIL-LICENSEP License Plate Bracket for Lights up to 20"



Part # - 9892313 Item # - XIL-WINCH6 Light Bar Winch Fairlead 6" Bracket (Available in 10")



**PCV COVERS** Black & Amber Snap on Light Bar Covers